



好幫手全自動中型碟煞式電動起子

ASA Full-auto disk-brake shut off medium torque electric screwdrivers

高壓直流馬達驅動型（直接插入市電）

High voltage DC motor driving (controllerless)



可訂製ESD防靜電型

ESD type is available for ordering.



IT'S VERY WELL
MADE IN TAIWAN

特點 Feature

- 符合人因工學及蛋形防滑設計，外形輕便。
- 碳刷耗量自動警示照明設計。
- 世界專利碟刹式剎車設計，可降低因剎車帶來火花產生高溫及破壞電子零件的維修費用。
- 直接插入市電即可操作。

- Ergonomics and anti-slip egg-shaped design ensures operator comfort.
- Light warns when carbon brush needs replacement.
- Internationally patented disk brake design to prevent the sparks caused by the motor abruptly stop with reverse voltage that it will damage electronic components and led to high repair costs.
- Direct plug-in type.

下壓式 Push to start type (PS) · 快速式 High speed type (S)

機種名 Model No.	輸出扭力範圍 Torque range		無載轉速(±10%) No Load Speed (rpm)	適用螺絲 Available screw	
	kgf-cm	lbf-in		機械牙徑 Machine screw ϕ	自攻牙徑 Tapping screw ϕ
ASC-3681	2.2 ~ 12.0	1.9 ~ 10.4	950	2.0 ~ 3.0mm / 0.08 ~ 0.12in	2.0 ~ 2.6mm / 0.08 ~ 0.10in
ASC-3682	2.2 ~ 12.0	1.9 ~ 10.4	950	2.0 ~ 3.0mm / 0.08 ~ 0.12in	2.0 ~ 2.6mm / 0.08 ~ 0.10in
ASC-5681	4.0 ~ 18.0	3.5 ~ 15.6	1000	2.6 ~ 4.0mm / 0.10 ~ 0.16in	2.3 ~ 3.5mm / 0.09 ~ 0.14in
ASC-5682	4.0 ~ 18.0	3.5 ~ 15.6	1000	2.6 ~ 4.0mm / 0.10 ~ 0.16in	2.3 ~ 3.5mm / 0.09 ~ 0.14in
ASC-6681	8.0 ~ 25.0	6.9 ~ 21.7	650	3.0 ~ 4.5mm / 0.12 ~ 0.18in	2.6 ~ 4.0mm / 0.10 ~ 0.16in
ASC-6682	8.0 ~ 25.0	6.9 ~ 21.7	650	3.0 ~ 4.5mm / 0.12 ~ 0.18in	2.6 ~ 4.0mm / 0.10 ~ 0.16in


* 備註：機種名最後一碼 (1)表115VAC (2)表230VAC

Remark: Last No. of model name denotes VAC "1"=115VAC, "2"=230VAC


電動起子週邊設備 (選購品) Attachment of electric screwdriver (Optional)

外觀 Outline	名稱 Description	規格 Specification			
	扭力護套 Torque cover	6H1047			
	彈吊車 Balancer 本產品可適用於無塵室，並通過SGS-10等級測試。 This product can be used in the clean room. It has passed SGS Clean room Class-10 test.	型號 Model	載重 Load		伸縮長 Extend L.
			kgs	lbs	
		SB-1.2	0.5-1.2	1.1-2.6	1.6 m
		SB-2.0	1.0-2.0	2.2-4.4	1.6 m
		SB-3.0	2.0-3.0	4.4-6.6	1.6 m
	磁環 MAG-O-NETS	編號 Parts NO.	內徑 ID	外徑 OD	厚度 Thick
		AM 1/4	7 mm	17.5 mm	10 mm
		AM 5	5 mm	17.5 mm	10 mm
		AM 4	4 mm	17.5 mm	10 mm

輸出扭力曲線表 Torque Curve

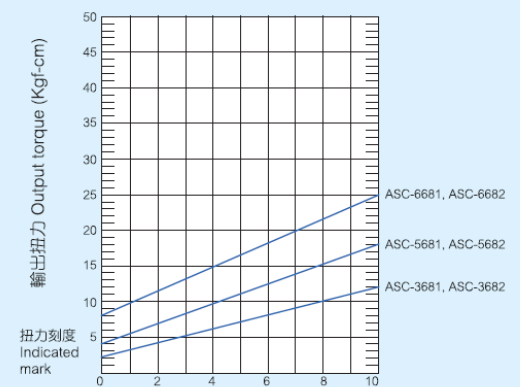

下壓式 Push to start type (PS)

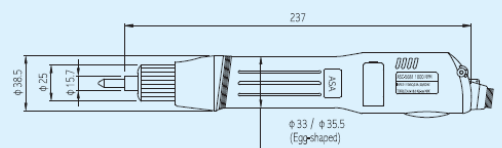

Unit : mm

工作電壓 Power Source	115 or 230VAC
扭力精度 Torque Accuracy	極精準 High precision
扭力調整 Torque Setting	無段式 Stepless
重量 Weight	535g / 1.18lb
長度 Length	237mm / 9.3in
握持直徑 Grip diameter	33mm / 1.3in
適用起子頭 (選購品) Available bit size (optional)	$\phi 5$, 5.0mm 六角對邊 hex shank 6.35(1/4") 六角對邊 hex shank