




特點 Feature

- 通用電源：通用於100-240VAC 50/60Hz全球性電壓源。
 - 輸出無段控制：輸出無段控制及恆壓功能，最適合於電子科技產業追求輕、薄、短、小的組裝作業；螺絲越小，螺絲鎖付的要求越高，無論較長或較短的螺絲均能滿足高精度、低慣量的鎖付要求。
 - 軟式啟動：電源控制器內置0-1秒軟式啟動功能，鎖螺絲時最初以慢速轉入中心孔穴後即自動轉換全速鎖入，有效降低螺絲與被鎖物之間的鬆動率。
 - 附有輸出訊號端子，可與外部控制器連結達到控制一體化功能。
- Universal power source: It is suitable for any power source ranges between 100-240VAC.
 - Stepless control: Stepless control and constant voltage; very suitable for the electronic technology industry which pursues thinness, lightness, shortness and smallness assembling work; the smaller the screw, the higher locking and tightening is required; both long and short screws can be locked and meet the requirement of high precision and low inertia at the same time.
 - Soft start: There is 0-1 sec. soft-start function inside the power supply. The speed of fastening will gradually change from slow to fast motion during the fastening task. This lowers screw's levels of shaking during the operation.
 - With output signal terminal, it can connect with the external controller and reached the function of control integration.

尺寸圖 Dimension

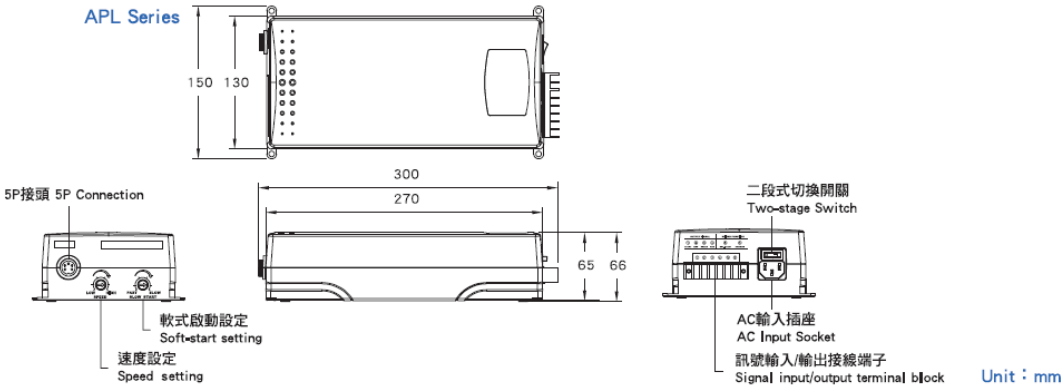

機型規格 Model and Specifications

項目 ITEM	機種名 Model No.	APL-301B
輸入電壓VAC Input Voltage VAC		100-240V、50/60Hz
輸出電壓VDC Output Voltage VDC		25-30V
軟式啟動 Soft-start		無段設定 Stepless control
輸出電壓設定 Output Voltage setting		無段設定 Stepless control
輸出端子 Output Pin		5針 5 pin
內部訊號輸出 Internal signal output		啟動訊號/煞車訊號 Switch signal/Shut off signal
外部訊號輸入 External signal input		啟動訊號 Switch signal
可控制起子數 No. of Screwdriver/power supply		1支 1 pcs
消耗功率(W) Power(W)		90W
適用電動起子型號 Applicable Electric Screwdriver models		ASA-8500/PS ASA-9000/PS
體積(mm) Dimension (mm)		270X130X66mm
重量(g) Weight (g)		1100g
AC電源線長度(m) AC cable length (m)		1.8M
安規認證 Approval by		CB,CE,ROHS,REACH
附屬品 Accessories		小螺絲刀、AC電源線 Small screwdriver, and AC cable