




特點 Feature

- 雙電源：100-240V通用電源，輸出恆壓功能。
- 無段控制：電子科技產業追求薄、輕、短、小為未來科技主流，螺絲外形越小，螺絲鎖付緊固要求越高，無論較長或較短螺絲均能鎖付，同時滿足高精度與低貴量的需求。
- 軟式啟動：電源供應器內置 0~1 秒軟式啟動功能，第一圈慢速轉入至中心孔穴時即全速鎖入，有效降低螺絲與被鎖物之間的鬆動率。
- 數位辨識系統：電源供應器連接電動起子，電源開機的同時會自動偵測電動工具類型。
- Universal power source: It is suitable for any power source ranges between 100-240VAC.
- Stepless control: The electronic technology industry pursues thinness, lightness, shortness and smallness as the main stream in the future; the smaller the screw, the higher locking and tightening is required; both long and short screws can be locked and meet the requirements of high precision and low inertia at the same time.
- Soft start: There is 0-1 sec. soft-start function inside the power supply. The speed of fastening will gradually change from slow to fast motion during the fastening task. This lowers screw's levels of shaking during the operation.
- Digital identified system: When power supply connects to screwdriver and power is on, it will automatically detect type of electronic tools.

尺寸圖 Dimension

APM Series

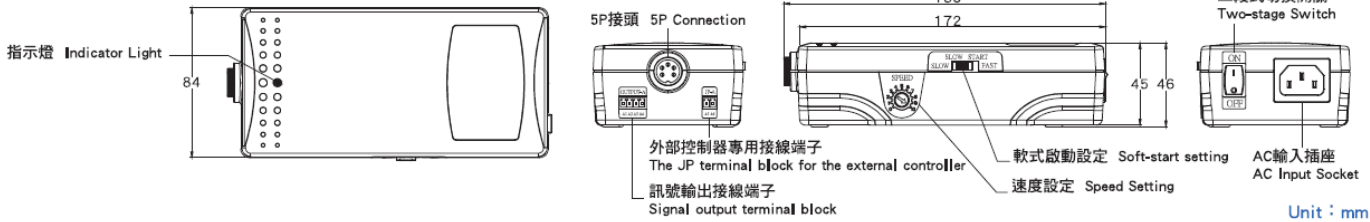

機型規格 Model and Specifications

項目 ITEM	機種名 Model No.	APM-202B	APM-302B	APM-302C	APM-352B
輸入電壓VAC Input Voltage VAC		100-240V 、 50/60Hz			
輸出電壓VDC Output Voltage VDC		9-19V	20-30V	20-30V	25-35V
軟式啟動 Soft-start		無此功能 N/A	0-1sec.	0-1sec.	0-1sec.
輸出電壓設定 Output Voltage setting		無段設定 Stepless control			
輸出端子 Output Pin		5針 5 pin	5針 5 pin	6針 6 pin	5針 5 pin
內部訊號輸出 Internal signal output		啟動訊號/煞車訊號 Switch signal/Shut off signal			
外部訊號輸入 External signal input		啟動訊號 Switch signal			
可控制起子數 No. of Screwdriver/power supply		1支 1 pcs			
消耗功率(W) Power(W)		32.3W	51W	51W	52.5W
適用電動起子型號 Applicable Electric Screwdriver models		ASA-S1000M/A ASA-S1000M/A ASA-S1000M/A BS-100	ASA-S1000M/A BS-400 ASA-S2000M/A BS-450 ASA-S2500M/A BS-2000 ASA-2000M/S/A BS-3000 ASA-3000M/S/A BS-4000 ASA-4000M/S/A BS-4000F BS-100F BS-6000 BS-200 BS-6500 BS-250 BS-6800 BS-300	ASA-6000/PS ASA-6500/PS ASA-6800/PS ASA-7500/PS	ASA-2000/S ASA-3000/S ASA-4000/S ASA-4500/S
體積(mm) Dimension (mm)		172X84X46mm			
重量(g) Weight (g)		380g			
AC電源線長度(m) AC cable length (m)		1.8M			
安規認證 Approval by		CB, CE, UL(CUL), ROHS, REACH, KC, FCC, UKCA			
附屬品 Accessories		小螺絲刀、2P/4P插座式端子×1、AC電源線 Small screwdriver, 2P/4P socket terminal 1 pieces, and AC cable			