

# ASA 可調式螺絲整列機


## Adjustable Screw Feeder



### 特點 Feature

- 分離式軌道設計，軌道可以抽出自由做調整，非常方便。
- 專利設計，供料快捷，穩定、無卡螺絲現象。
- 新型專利AT-1030定軌定片式適合任何形狀M1.0-M3.0螺絲，可自動送料絕不卡機，可用於自動化、氣吸式。
- 可按工作需要自由調整螺絲整列機送料速度和進料速度。
- 可使用特殊1:1短螺絲、帶墊片螺絲都可以通用。
- 體積小巧，不占空間，移動方便。
- 通用電源：通用於100-240VAC 50/60Hz全球性電壓源。
- 送料與震動驅動獨立控制，可自由設定理想的延時停止時間，當非正常情況產生時螺絲機會啟動故障警報功能。
- The design of separating rail allows free adjustment and it is easy to operate.
- The special design of the structure makes feeding fast and stable without idled screws being stuck in the machine.
- AT-1030 is designed with fixed rail and rotary plate and is suitable for various screws M1.0-M3.0. Its automatic screw feeding prevents screws from being stuck inside the machine.
- This machine can be used with automation and air screwdrivers.
- The feeding and charging speed of the machine can be adjusted freely according to the operating requirement.
- This machine is suitable for both special 1:1 short screws and screws with washer.
- Small size, occupying little space, and easy to move.
- Universal power source: It is suitable for power source ranges between 100-240VAC 50/60Hz.
- The drives of feeding and shaking are controlled independently. You can set your ideal lag shutdown time freely. The breakdown alarm function will be automatically turned on in case of abnormal conditions.

### 螺絲類型 Screw Type

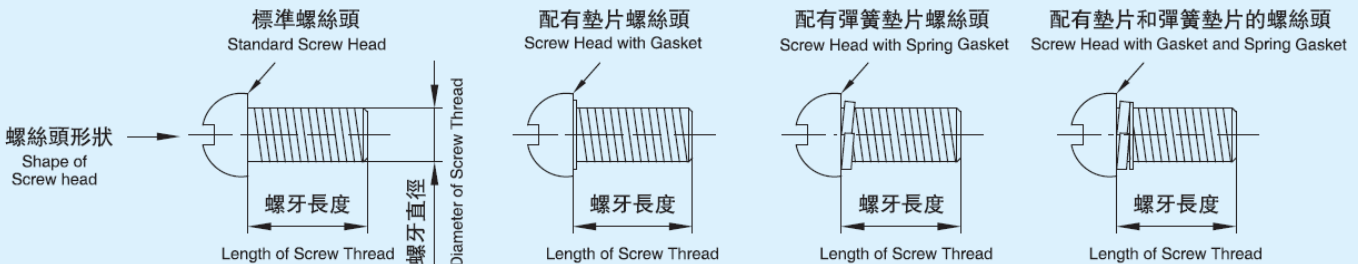

### 機型規格 Model and Specifications

機種名 Model No.		AT-1050 標準型 standard	AT-1050C 計數器型 counting	AT-1060 標準型 standard	AT-1060C 計數器型 counting	AT-1030TC 自動化／氣吸式 for automation/vacuum pick up type
適用螺絲 Available Screw	螺絲牙徑 Diameter of Screw Thread	M2.0 - 5.0 mm	M2.0 - 5.0 mm	M2.0 - 6.0 mm	M2.0 - 6.0 mm	M1.0 - 3.0 mm
	螺絲頭類型 Type of Screw Head	JCIS : 1、2、3及截錐頭型 JIS : 截錐頭型、鈕扣型、傘頭型、圓頭型、埋頭型、WH、附彈簧墊片、附彈簧加平面墊片 JCIS : 1,2,3, and pan-headed JIS : Pan head, button, truss, round, flat, WH, w/t spring washer, and w/t spring washer and flat		JCIS : 1、2、3、4 類血型頭 JIS : 血型頭、加緊、壓力、UH罩狀頭（埋頭或橢圓埋頭）帶或不帶墊圈 JCIS : 1,2,3,4, and flat-headed JIS : flat head, tightening screw, pressure screw, and UH mushroom, head(Flat head or oval flat head) w/t or without washer		
	螺絲頭材料 Material of Screw Head	鐵或為磁鐵所吸引的材料 Iron or the material which can be attracted by the magnet				
	螺絲長度(最大) Length of Screw (Maximum)	20 mm		25 mm		10 mm
	螺絲長度(最小) Length of Screw (Minimum)	單一的：直徑 x 1.0；帶彈簧墊圈：直徑 + (0.5 x 直徑)；帶彈簧墊圈和墊圈：直徑 + (1.1 x 直徑) Single screw: diameter x 1.0; Screw with spring washer: diameter + (0.5 x diameter); Screw with spring washer and flat washer: diameter + (1.1 x diameter)				
輸出速度 Output Speed		2顆/秒 2 pcs/second				
保護/恢復功能 Protection / Recovery Function		過載保護電路、逆功率極性防止電路 Overload protection circuit, reverse power polarity prevention circuit				
輸入電壓 Input Voltage		12 VDC				
專用充電器 AC adaptor		輸入：AC100-240V、50/60 Hz 輸出：12VDC Input: AC100-240V Output: 12VDC				
外形尺寸 (mm) Dimension (mm)		185×130×150 mm		235×165×180 mm		215×125×150 mm
產品重量 (kg) Weight (kg)		1.8 kg	2.2 kg	4.8 kg	4.8 kg	3.1 kg
附帶配件 Accessories		操作手冊，通用型AC電源適配器，內六角扳手 Operation manual : AC adapter : Hexagon wrench				